

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : H03K 23/66, H04B 1/40</p>	<p>A1</p>	<p>(11) International Publication Number: <b>WO 99/27651</b> (43) International Publication Date: 3 June 1999 (03.06.99)</p>
<p>(21) International Application Number: PCT/EP98/07355 (22) International Filing Date: 17 November 1998 (17.11.98) (30) Priority Data: 9724696.1 21 November 1997 (21.11.97) GB (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: GUSTAFSSON, Kjell; Borgåsslingen 2, S-224 72 Lund (SE). ATARIUS, Roozbeh; Musikanvägen 8B, S-224 68 Lund (SE). (74) Agent: O'CONNELL, David, Christopher; Haseltine Lake &amp; Co., Imperial House, 15-19 Kingsway, London WC2B 6UD (GB).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: METHOD AND CIRCUIT FOR SAMPLING AN ANALOG SIGNAL

(57) Abstract

A circuit is disclosed for sampling analog signals at a rate which is a rational, non-integer fraction of a clock frequency. The analog signal is sampled at non-equidistant sampling points, with the distances between successive points forming a jitter sequence. The jitter sequence is pre-calculated and stored in a memory within the circuit, reducing processing requirements in use.

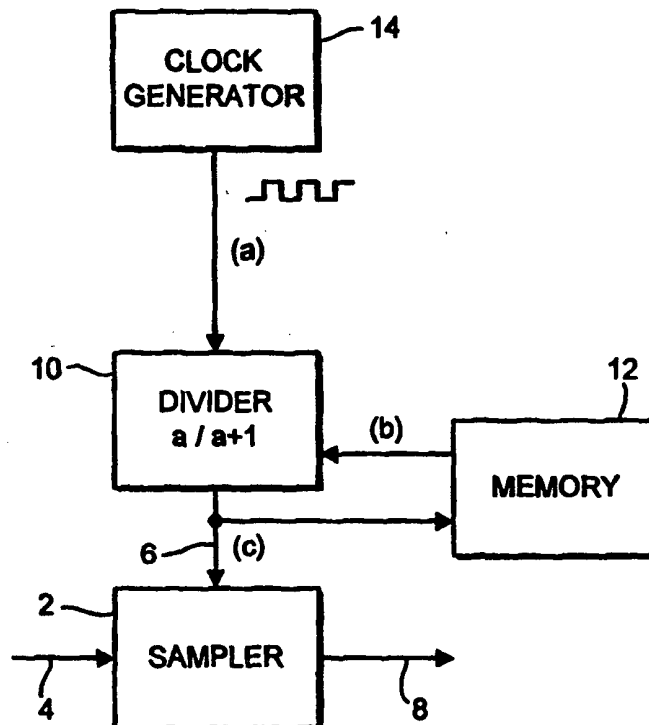

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## METHOD AND CIRCUIT FOR SAMPLING AN ANALOG SIGNAL

TECHNICAL FIELD OF THE INVENTION

This invention relates to a method and a device for signal processing, and in particular to the sampling of analog signals.

DESCRIPTION OF RELATED ART

When sampling an analog signal, for example when converting an analog speech signal to a digital signal, it is convenient to be able to select the frequency of a master clock which controls the sampler to be an integer multiple of the sample rate of the digital signal. However, in the case of, for example, a dual mode cellular phone, which needs to be able to sample analog signals in order to achieve two distinct symbol rates for use in the two modes, it is also advantageous to be able to provide only one master clock frequency generator. If so, it is usually the case that, if one of the sampling rates is an integer fraction of the master clock frequency, then the other is not an integer fraction.

WO96/16482 describes an analog-to-digital converter in which an analog signal is sampled at a rate which is a non-integer fraction of the master clock frequency. Specifically, the analog-to-digital converter includes a sigma-delta modulator for varying the temporal spacing between digital samples. In particular, the delta-sigma modulator is used to generate a jitter sequence, in accordance with which the gap between adjacent digital samples is controlled between two chosen values. The average gap between adjacent samples is the inverse of the sampling rate which is achieved, and the delta-sigma modulator is used to generate a jitter sequence in which the sampling noise, namely the difference between this output sampling and true sampling at the desired sample

-2-

rate, is hopefully minimised.

However, the requirement to incorporate a delta-sigma modulator in the device adds complication thereto, and increases the power consumption thereof, while fixing the jitter sequence to that generated by the delta-sigma modulator.

#### SUMMARY OF THE INVENTION

In accordance with the invention, the jitter sequence, in accordance with which the analog signal is sampled, is calculated off-line, and stored in a memory within the device.

This has the advantage that the device itself is simpler and has a lower power consumption.

Preferably, the memory is reprogrammable. This has the advantage that the jitter sequence can be replaced at any time if an improved sequence is devised.

In accordance with one preferred aspect of the invention, there is provided a sampling circuit, including a memory for storing a sequence of values, the gap between adjacent samples being controlled by the sequence.

In accordance with a second aspect of the invention, there is provided a method of sampling a signal, the method comprising sampling the signal at a plurality of points in time, each point being separated from the next by an integer number of cycles at the clock frequency, and the number of cycles separating successive samples forming a sequence, the sequence being pre-calculated and stored.

In accordance with a further aspect of the invention, there is provided a dual mode telephone in which, in one mode, the incoming signal is sampled at a non-integer fraction of a clock frequency, using a jitter sequence to control the sampling.

-3-

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block schematic diagram of a sampling circuit in accordance with the invention.

5 Figure 2 is a timing diagram showing signals generated in accordance with the invention.

Figure 3 is a flow chart illustrating a method carried out in accordance with the invention.

10 Figure 4 is a block schematic diagram of a dual mode mobile phone in accordance with a further aspect of the invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The device of Figure 1 includes a sampler 2, which receives an input analog signal at its signal input 4 and receives a control signal on its control input 6.  
15 The sampled value of the input analog signal is supplied on the output 8 of the sampler 2.

The control signal received by the sampler 2 is supplied by a divider 10 under the control of signals supplied from a memory 12, and derived from a master clock signal supplied from a clock generator 14. The clock generator 14 supplies a master clock signal at a predetermined frequency which may, for example, be used elsewhere in the device. The divider 10 is able to divide the frequency of the master clock signal by a  
20 selected one of a plurality of integers. For example, in the preferred embodiment, these are two consecutive integers  $a$  and  $a+1$ , which will be chosen to be respectively less than and greater than the desired average division ratio, and the input received from the memory 12 at any time determines whether the divider  
25 next provides an output pulse after a master clock signal pulses, or after  $a+1$  such pulses.

30 The memory 12 contains a precalculated sequence of zeros and ones which are supplied to the divider 10, to control its division ratio.  
35

-4-

Figure 2 is a timing diagram showing the signals at different points in the circuit of Figure 1. In Figure 2, line (a) shows the master clock signal supplied by the clock generator 14 to the divider 10. Line (b) shows the sequence of zeros and ones supplied by the memory 12 to the divider 10. Line (c) shows the sequence of secondary clock pulses supplied by the divider 10 to the sampler 6 as control signals. This is a particularly simple example, which is purely for illustrative purposes. In this example, it is desired to produce digital samples at a rate which is lower than the frequency of the master clock signal by a factor of 5%. For example, if the master clock frequency is at 17MHz, the sampling rate will be 3MHz.

Thus, the clock generator 14 produces an output pulse train as shown in line (a), in a way which will be well known to those skilled in the art.

Because the required sample rate is 1/5% of the master clock frequency, the divider 10 is chosen to be able to divide the master clock frequency by either 5 or 6, that is, the adjacent integers respectively less than and greater than the required dividing factor.

Thus, as can be seen in line (c), the divider produces an output pulse following the receipt of either 5 or 6 input clock pulses. Thus, at time t1, an output pulse is produced by the divider 10, as shown in line (c). This pulse is supplied to the sampler 2, which takes a sample of the analog signal. Moreover, the pulse from the divider 10 is also supplied to the memory 12. Memory 12 stores a preprogrammed sequence of ones and zeros, which are used to control the divider 10. In this case, when the memory 10 supplies a "one" to the divider 10, the divider produces an output clock signal following receipt of 5 input pulses. When the memory 12 supplies a "zero" to the

-5-

divider 10, the divider supplies an output pulse signal following receipt of 6 input clock pulses. In this simple example, the stored sequence is 1 0 0 1 0 0 1 0 0 ... . However, it will be appreciated that any  
5 recurring sequence which contains twice as many zeros as ones will produce an output pulse sequence which produces a dividing factor of 5%. Different sequences will produce different noise components, and the person skilled in the art can select an appropriate sequence  
10 to minimise the noise, or at least the noise component at frequencies of interest, while storing the shortest sequence possible for ease of implementation.

Thus, returning to Figure 2, at time t2, following receipt of 5 master clock pulses, the divider produces  
15 a further secondary clock pulse, which causes a zero to be output from memory 12. Further, at time t3, following receipt of 6 master clock pulses, the next secondary clock pulse is generated, which causes the next value to be output from the memory 12. In this  
20 case, the next such value is again a zero. Following receipt of a further 6 master clock pulses at time t4, the divider outputs a further secondary clock pulse, which again causes the next value to be output from the memory 12. On this occasion, that next value is a 1,  
25 and so, at time t5, after the receipt of a further 5 master clock pulses, the divider outputs the next secondary clock pulse.

Thus, as shown in Figure 2(c), the sampling points are non-equidistant, and the distances between  
30 successive points form a jitter sequence, which has been pre-calculated to give the desired properties.

This cyclical process is further illustrated in Figure 3, which is a flow chart showing the operation of the device. Thus, in step S1, the divider 10  
35 retrieves a bit from the memory 12, which determines

-6-

its division ratio for the time being. In step S2, the divider 10 monitors the input pulses and, in step S3, following receipt of the number of pulses indicated by the division ratio, it outputs a secondary pulse. This  
5 secondary pulse is used in step S4 to trigger the sampler 2 to take a sample of the analog signal and the process returns to the start as the secondary pulse also causes the next bit in the stored sequence to be retrieved from the memory 12.

10 Figure 4 is a block schematic diagram of a dual mode cellular phone in accordance with an aspect of the invention. The phone is of generally conventional design, as well understood in the art, except where shown in Figure 4 and described in more detail below.

15 The phone 40 is a dual mode phone which is operable in two modes which have different symbol rates, that is, different rates at which received signals must be sampled. As an example, the phone may be operable in AMPS (Advanced Mobile Phone System) and  
20 PCS (Phone Cellular System) modes.

The phone 40 includes an antenna 42, RF processing circuitry 44, sampler 46, baseband processing circuitry 48, and interface (loudspeaker, etc) 50. The sampler 46 operates on the basis of a clock signal generated by  
25 master clock circuitry 52, and control circuitry 54. In this exemplary embodiment, the master clock 52 operates at 13MHz. In the PCS mode, the required sampling rate is 270.833 kHz, which is 1/48 of this master clock frequency. The control circuitry 54 can  
30 operate in an entirely conventional way to cause the sampler 46 to sample received input signals at the desired rate.

However, in the AMPS mode, the desired sampling rate is not a simple fraction of the master clock  
35 frequency, and hence the control circuitry 54 includes

-7-

a divider 10 and memory 12 as shown in Figure 1, which allow it to cause the sampler 46 to sample the received signals at the desired rate.

Thus, depending on the desired mode of operation,  
5 the control circuitry 54 switches between two sampling modes with different sampling rates.

The generation of the secondary clock pulses at a rate which jitters between two distinct sampling rates, each of which is an integer factor of a master clock frequency, produces the correct average sampling rate.  
10 However, jittering also introduces noise. The exact sequence stored in the memory 12 is crucial in determining the characteristics of this noise component. The sequence stored in the memory is pre-calculated off-line. For example, delta-sigma  
15 modulation might be used, but any other method which produces a sequence with a desirable spectral content can be used. For example, the length of the stored sequence can be as long as is required to give the  
20 desired spectral properties of the jitter, consistent with an acceptable requirement for memory usage.

In the example described above, the divider is able to select between two division ratios, which are adjacent integers. However, it will be appreciated  
25 that these division ratios need not be adjacent. Moreover, the divider may if desired be able to select between more than two division ratios. In this latter case, the memory must store not just a sequence of binary values, but a sequence of two-or-more-bit  
30 values. Any such variation or modification may be made, in order to achieve desirable results in the output signal.

It is an advantage of the invention that any available method may be used for calculating the stored  
35 sequence, because these calculations are carried out

-8-

only once, off-line, and do not need to be performed in real time. Moreover, the memory 12 is advantageously reprogrammable, allowing the stored sequence to be replaced by an improved sequence at a later date.

- 5        There is thus described a sampling circuit which is easy to implement and has low power consumption, while providing desirable sampling properties.

CLAIMS

1. A sampling circuit comprising means for sampling an analog signal at a plurality of points in time, each point being separated from the next by an integer number of cycles at a clock frequency, and the numbers of clock cycles separating successive pairs of sampling points forming a sequence, wherein the circuit further comprises means for storing the said sequence, which has been previously calculated.
2. A sampling circuit as claimed in claim 1, wherein the means for storing the said sequence is a reprogrammable memory.
3. A sampling circuit as claimed in claim 1, wherein the means for storing the said sequence stores a sequence of digital values, wherein the number of clock cycles between two successive sampling points of the analog signal is determined by a present value from the stored sequence, and wherein a next value from the stored sequence is output following each sampling point.
4. A sampling circuit as claimed in claim 3, wherein the digital values are single bits.
5. A sampling circuit as claimed in claim 3, wherein the number of clock cycles between two successive sampling points of the analog signal can be either a first integer or a second integer, depending on the present value from the stored sequence.
6. A sampling circuit as claimed in claim 5, wherein the first and second integers are consecutive.
7. A sampling circuit as claimed in claim 1, further comprising a clock generator for producing a signal at the clock frequency.
8. A sampling circuit as claimed in claim 1, wherein the stored sequence has been previously calculated using delta-sigma modulation.

-10-

9. A sampling circuit, comprising:  
an input for an analog signal;  
means for receiving a master clock signal;  
a divider for dividing the clock signal frequency  
5 by an integer number to produce output secondary clock  
pulses, the integer number being chosen from a  
plurality of available integer numbers in response to a  
divider input signal;  
means for sampling the input analog signal in  
10 response to the secondary clock pulses; and  
means for storing a predetermined sequence of  
signals for supply to the divider as divider input  
signals.
10. A sampling circuit as claimed in claim 9,  
15 wherein a next signal from the stored predetermined  
sequence of signals is supplied to the divider in  
response to each secondary clock pulse.
11. A sampling circuit as claimed in claim 9,  
wherein the available integer numbers are two  
20 consecutive integer numbers, and the predetermined  
sequence of signals comprises single-bit digital  
values.
12. A sampling circuit as claimed in claim 9,  
wherein the available integer numbers comprise more  
25 than two integer numbers, and the predetermined  
sequence of signals comprises multiple-bit digital  
values.
13. A sampling circuit as claimed in claim 9,  
wherein the divider outputs a secondary clock signal  
30 pulse, following receipt of the chosen integer number  
of master clock signal pulses, and the means for  
sampling the input analog signal takes a sample on  
receipt of the secondary clock signal pulse.
14. A method of sampling an analog signal at a  
35 rate which is a rational, non-integer fraction of a

-11-

clock frequency, the method comprising sampling the analog signal at a plurality of points in time, each point being separated from the next by an integer number of cycles at the clock frequency, and the numbers of clock cycles separating successive pairs of sampling points forming a sequence, and the method further comprising calculating in advance, and storing, the said sequence.

15        15. A method as claimed in claim 14, comprising calculating the stored sequence using delta-sigma modulation.

16. A dual mode phone, comprising:  
receiver circuitry for incoming analog signals;  
a sampler for the incoming analog signals;  
15        a clock signal generator for producing a clock signal having a clock frequency; and  
a control device, the control device being operable to control the operation of the sampler in first and second modes, wherein, in a first mode, the  
20        sampler samples the analog signal at a rate which is a rational, non-integer fraction of the clock frequency, the control device being operable to cause the sampler to sample the analog signal at a plurality of points in time, each point being separated from the next by an  
25        integer number of cycles at the clock frequency, and the numbers of cycles separating successive pairs of sampling points forming a sequence, the control device further including a memory for storing the said sequence.

30        17. A dual mode phone as claimed in claim 16, wherein, in a second mode, the sampler samples the analog signal at a rate which is an integer fraction of the clock frequency.

1 / 2

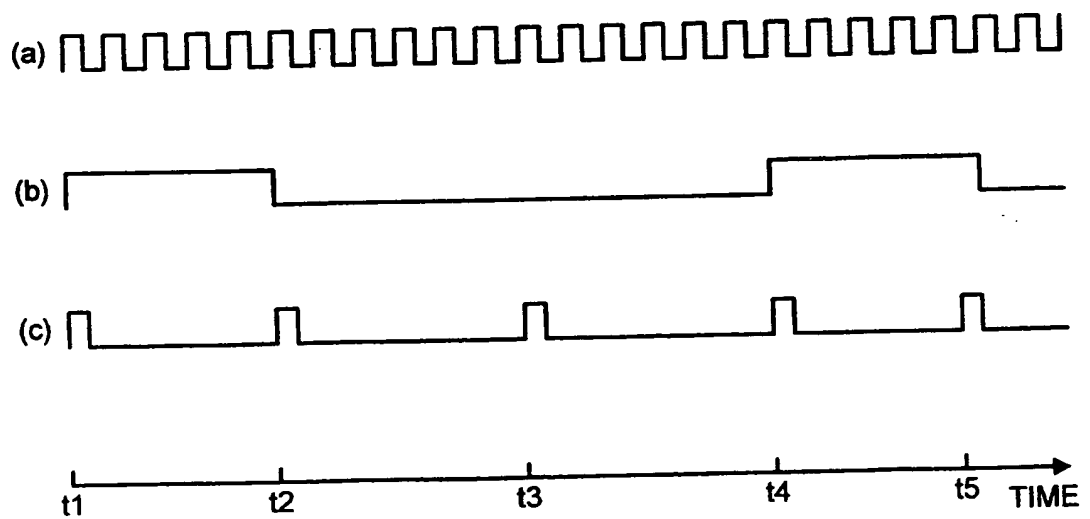
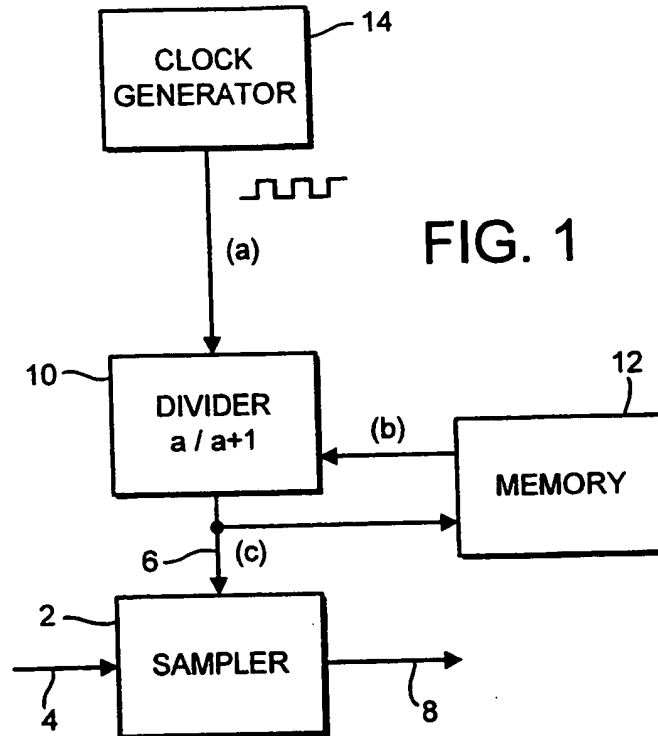


FIG. 2

2 / 2

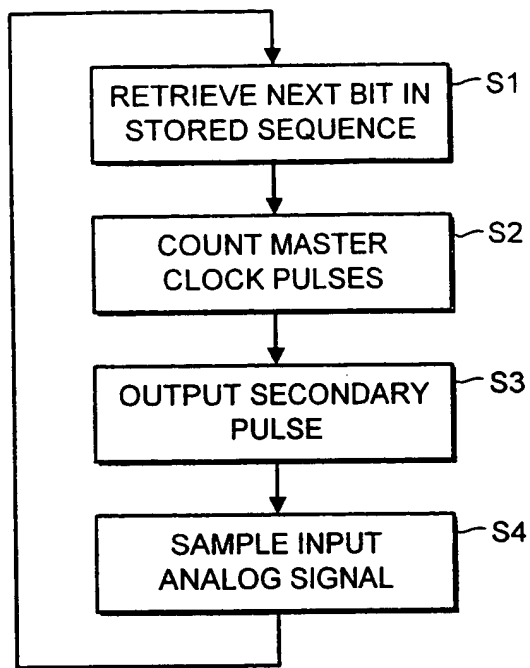


FIG. 3

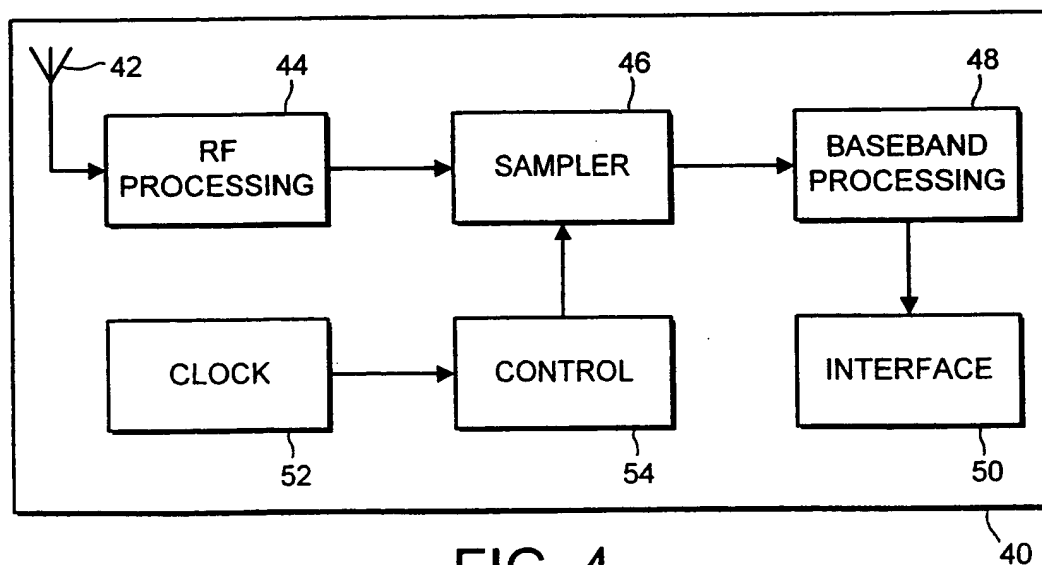


FIG. 4

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 98/07355

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H03L 33/66 H04B1/40

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H03K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 619 202 A (SOBOL JAMES M ET AL) 8 April 1997 cited in the application see column 4, line 6 - column 5, line 63; figure 2	1-17
Y	DE 35 21 288 A (SIEMENS AG) 18 December 1986 see page 5, line 5 - line 7 see page 5, line 27 - page 10, last line see page 7, line 32 - line 35 see page 9, line 31 - line 34 see figures	1-17
Y	EP 0 019 412 A (MARCONI CO LTD) 26 November 1980 see page 8, line 1 - page 9, line 24; figure 2	1-11, 13-17
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

### \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

18 March 1999

Date of mailing of the international search report

25/03/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Balbinot, H

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 98/07355

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JOHNSON M J: "A SIMPLE TECHNIQUE FOR FRACTIONAL DIGITAL DIVISION" MOTOROLA TECHNICAL DEVELOPMENTS, vol. 11, 1 October 1990, pages 3-4, XP000178594 see the whole document	1-17
Y	US 5 610 559 A (DENT PAUL W) 11 March 1997 see column 6, line 23 - line 28; figures 1,2 see column 2, line 54 - column 3, line 31 see column 6, line 15 - line 28	16,17

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 98/07355

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5619202	A	08-04-1997	EP 0793876 A	10-09-1997
			WO 9616482 A	30-05-1996
			US 5625358 A	29-04-1997
			US 5625359 A	29-04-1997
			US 5528240 A	18-06-1996
			US 5574454 A	12-11-1996
			US 5552785 A	03-09-1996
DE 3521288	A	18-12-1986	NONE	
EP 0019412	A	26-11-1980	GB 2049245 A	17-12-1980
			JP 55150621 A	22-11-1980
US 5610559	A	11-03-1997	US 5535432 A	09-07-1996
			AU 691042 B	07-05-1998
			AU 3729795 A	29-03-1996
			EP 0781475 A	02-07-1997
			FI 971055 A	14-05-1997
			JP 10505981 T	09-06-1998
			WO 9608883 A	21-03-1996

Docket # L&L-10177

Applic. # \_\_\_\_\_

Applicant: B. GUNZELMANN ET AL.

Lerner and Greenberg, P.A.

Post Office Box 2480

Hollywood, FL 33022-2480

Tel: (954) 925-1100 Fax: (954) 925-1101

DOCKET NO: \_\_\_\_\_

SERIAL NO: \_\_\_\_\_

APPLICANT: \_\_\_\_\_

LERNER AND GREENBERG P.A.

P.O. BOX 2480

HOLLYWOOD, FLORIDA 33022

TEL. (954) 925-1100